



TECHNICAL DATA

MASSES

Operating mass (incl. Cab)	6700 kg
Module mass (front/rear)	3400 /3300 kg
Max. operating mass	6900 kg

DIMENSIONS

Compaction width	1680 mm
------------------	---------

COMPACTION

Static linear load	20.3 kg/cm
Nominal amplitude (high/low)	1,7 /0,8 mm
Vibration frequency (high/low amplitude)	32 /32 Hz
Centrifugal force (high/low amplitude)	114 /55 kN

TRACTION

Speed range	0 -10 km/h
Tyre size (16 ply)	400/60-22.5 flotation
Max. theoretical gradeability	56 %
Vertical oscillation	±9°
Number of pads	132
Pad area	84 cm ²

ENGINE



Manufacturer/Model	Kubota V3307-DI Stage IIIA/Tier 3
Type	Water cooled turbo Diesel
Rated power, SAE J1995	55 kW (75 hp) @ 2,200 rpm
Fuel tank capacity	117 l
Electrical system	12 V

HYDRAULIC SYSTEM

Driving	Hydrostatic with a traction pump supplying two parallel connected motors, one on rear axle and one on drum.
Vibration	Hydrostatic with a vibration pump supplying a motor connected to the eccentric axle generating the vibrations.
Steering	Mechanical-hydraulic with steering valve supplying the steering cylinder. Steering angle is proportional to steering wheel.
Service brake	Hydrostatic in forward and reverse lever.
Parking/ Emergency brake	Failsafe multidisc brake in rear axle and front drum motor.

Find us locally at www.dynapac.com

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines. The above information is a general description only, all information's are supplied without liability.

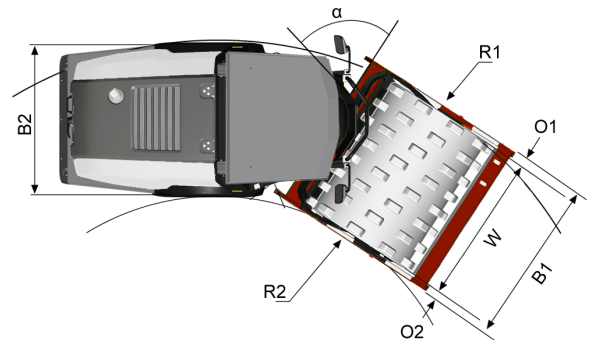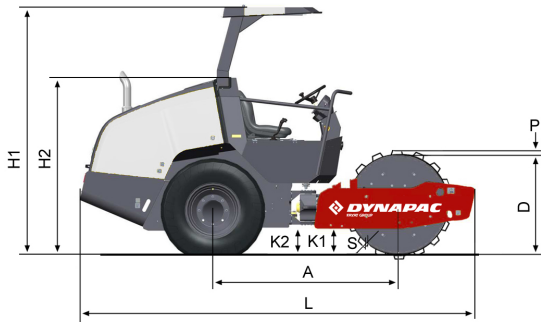

TECHNICAL DATA

DIMENSIONS

A. Wheelbase	2200 mm
B1. Width, front	1870 mm
B2. Width, rear	1530 mm
D. Drum diameter	1210 mm
H1. Height, with ROPS/cab	2700 mm
K1. Ground clearance	360 mm
K2. Curb clearance	360 mm
L. Length	4510 mm
O1. Overhang, right	95 mm
O2. Overhang, left	95 mm
P. Pad height	76 mm
R1. Turning radius, outside	4580 mm
R2. Turning radius, inside	2900 mm
S. Drum shell thickness	17 mm
W. Drum width	1680 mm
α. Steering angle	±33°

STANDARD EQUIPMENT

- Back up alarm
- Battery switch (std)
- Brake release
- Cup and can holder
- Differential lock (limited slip)
- Drive control (right side)
- Drum drive, ECO mode
- Emergency stop
- Engine 55 kW(StageIIIA/Tier3)
- Engine hood lockable
- Fuel level display
- High mounted exhaust pipe
- Horn
- Hour meter display
- Hydraulic checkpoints
- Hydraulic fluid filter "spin-on"
- Hydraulic fluid (mineral)
- Interlock, Key (starter)
- Lifting points
- Lifting points for jack
- Manuals (Operation & Maintenance)
- Manuals (Spare parts catalogue)
- Operator's platform (rubber mouted)
- Operator's station(fixed)
- Parking brake
- ROPS or cab
- Seat (adjustable)
- Seat belt 3"
- Storage box (on ROPS platform)
- Storage for laminated manuals
- Tie down points
- Vandal cover (instrument panel)
- Warning lights (brake, engine oil pressure, engine oil temperature, Engine diagnostics, low charge, low fuel level)

OPTIONAL EQUIPMENT

- Cab with AC
- seat belt 3 "
- Compaction Meter
- Dyn@link basic

Find us locally at www.dynapac.com

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines. The above information is a general description only, all information's are supplied without liability.