


**DURABILITY**

- Robust all-around protection cage with solid one-point lift.

**COMFORT**

- Low levels of hand arm vibration is made possible by the vibration damping solution.

**PRACTICAL**

- Easy access to daily check points like fuel tank cap, filter.

## TECHNICAL DATA

### MASSES

Basic mass	88 kg
Operating mass	90 kg

### COMPACTION

Frequency	91 Hz
Centrifugal force	14 kN
Amplitude	1.3 mm

### TRACTION

Speed	25 m/min
Max. gradeability	18 %
Max. working speed	25 m/min

### ENGINE

Manufacturer/Model	Honda GX 160
Emissions according to	EU Stage V & US EPA
Rated power	3.6 kW
Type	Air cooled, Petrol
Number of cylinders	1
Fuel type	Unleaded petrol or alkylate
Fuel consumption /h, avg.	0.65 l
Fuel tank capacity	3.1 l

Find us locally at [www.dynapac.com](http://www.dynapac.com)

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines. The above information is a general description only, all informations are supplied without liability.



#### DURABILITY

- Robust all-around protection cage with solid one-point lift.



#### COMFORT

- Low levels of hand arm vibration is made possible by the vibration damping solution.

#### PRACTICAL

- Easy access to daily check points like fuel tank cap, filter.

## DIMENSIONS

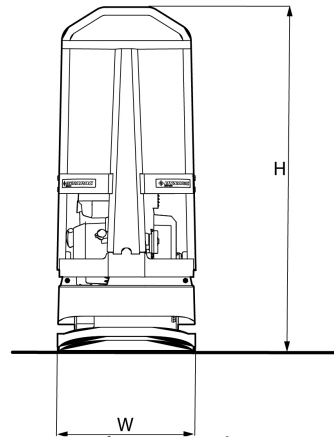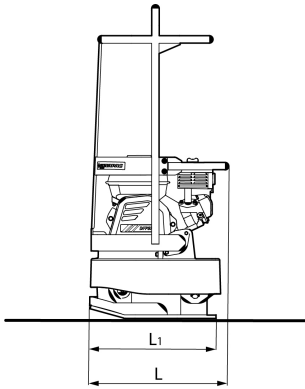

### DIMENSIONS

H. Height	1030 mm
L. Length	470 mm
L1. Length	425 mm
W. Basic plate width	430 mm

### STANDARD FEATURES

- Control handle -with vibration isolation
- Highly wear resistant base plate
- All around protection for V-belt
- One point lift
- Recoil starter

### OPTIONAL EQUIPMENT

- Service Kit

Find us locally at [www.dynapac.com](http://www.dynapac.com)

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines. The above information is a general description only, all informations are supplied without liability.