



## TECHNICAL DATA

### MASSES

Operating mass	108 kg
Basic mass	103 kg

### COMPACTION

Centrifugal force	25 kN
Water tank volume	13.5 l
Nominal amplitude	1.11 mm
Vibration frequency	92 Hz

### TRACTION

Max. gradeability	30 %
Max. working speed	30 m/min

### ENGINE

Manufacturer/Model	Honda GX 160
Emissions according to	Stage V /CARB Phase III
Type	Air cooled gasoline
Number of cylinders	1
Fuel consumption /h, avg.	1.1 l
Fuel tank capacity	3.1 l
Power	3.6 kW at 3600 rpm

### DRIVE SYSTEM



Drive system	Mechanical
--------------	------------

Find us locally at [www.dynapac.com](http://www.dynapac.com)

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines. The above information is a general description only, all informations are supplied without liability.



## DIMENSIONS

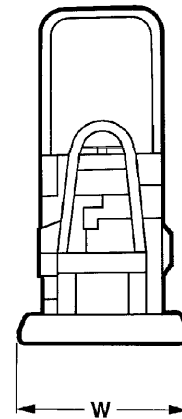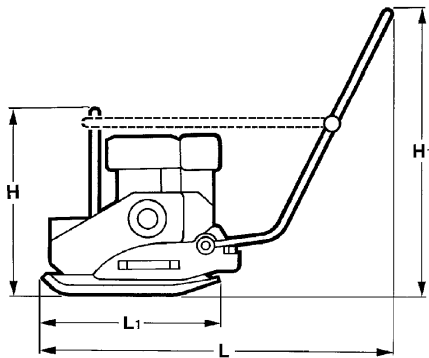

### DIMENSIONS

H. Height	658 mm
H1. Height	962 mm
H2. Height	700 mm
L. Length	1084 mm
L1. Length	542 mm
W. Basic plate width	500 mm

### STANDARD FEATURES

- Foldable steering handle with vibration isolation
- Highly wear resistant base plate
- Automatic shutdown at low oil level
- All around protection for V-belt
- Protection frame for powerpack
- Recoil starter
- Carrying handles
- One point lift

### OPTIONAL EQUIPMENT

- Water sprinkler system 13,5l (+10kg)
- Comfort handle
- Comfort handle, center mount
- Puncture proof transport wheels (+4kg)
- Block paving mat
- Service Kit

Find us locally at [www.dynapac.com](http://www.dynapac.com)

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines. The above information is a general description only, all informations are supplied without liability.