



TECHNICAL DATA

MASSES

Operating mass	90 kg
Basic mass	88 kg

COMPACTION

Frequency	93 Hz
Centrifugal force	15 kN
Amplitude	1 mm

TRACTION

Max. working speed	25 m/min
--------------------	----------

ENGINE

Manufacturer/Model	Honda GX160
Emissions according to	Stage V & US EPA
Type	Air cooled, petrol
Number of cylinders	1
Fuel consumption /h, avg.	1.4 l
Fuel tank capacity	3.10 l
Power	3.6 kW @ 3600 rpm

DRIVE SYSTEM

Drive system	Mechanical
--------------	------------


Find us locally at www.dynapac.com

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines. The above information is a general description only, all informations are supplied without liability.




DIMENSIONS

STANDARD HANDLE

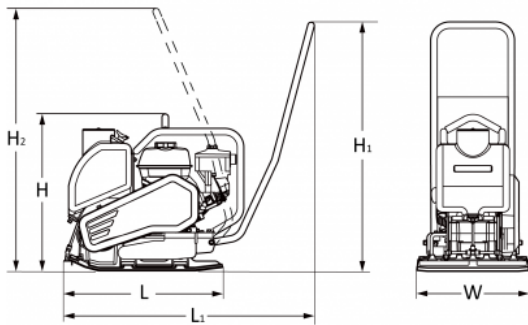

COMFORT HANDLE

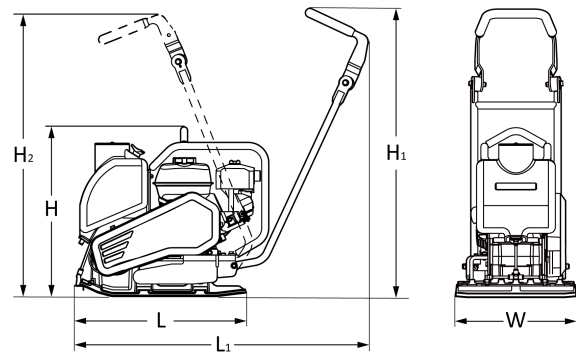

DIMENSIONS

H. Height	630 mm
H1. Height, standard handle	945 mm
H2. Height, standard handle	980 mm
L1. Length, standard handle	970 mm
H1. Height, comfort handle	990 mm
H2. Height, comfort handle	980 mm
L1. Length, comfort handle	1070 mm
L. Length	610 mm
W. Basic plate width	430 mm

STANDARD EQUIPMENT OPTIONAL EQUIPMENT

- | | |
|--|--|
| <ul style="list-style-type: none"> ■ Foldable steering handle with vibration isolation ■ Highly wear resistant base plate ■ Automatic decompression ■ All around protection for V-belt ■ Protection frame for powerpack ■ Recoil starter ■ Carrying handles ■ One point lift | <ul style="list-style-type: none"> ■ Water sprinkler system 11l (+2.5kg) ■ Comfort handle ■ Puncture proof transport wheels (+2kg) ■ Block paving mat ■ Service Kit |
|--|--|

Find us locally at www.dynapac.com

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines. The above information is a general description only, all informations are supplied without liability.