



## TECHNICAL DATA

### MASSES

Operating mass	94 kg
Basic mass	93 kg

### COMPACTION

Frequency	93 Hz
Centrifugal force	19 kN
Amplitude	1.2 mm

### TRACTION

Max. working speed	25 m/min
--------------------	----------

### ENGINE

Manufacturer/Model	Honda GX160
Emissions according to	Stage V & US EPA
Type	Air cooled, petrol
Number of cylinders	1
Fuel consumption /h, avg.	1.4 l
Fuel tank capacity	3.10 l
Power	3.6 kW @ 3600 rpm

### DRIVE SYSTEM

Drive system	Mechanical
--------------	------------


Find us locally at [www.dynapac.com](http://www.dynapac.com)

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines. The above information is a general description only, all informations are supplied without liability.




## DIMENSIONS

STANDARD HANDLE

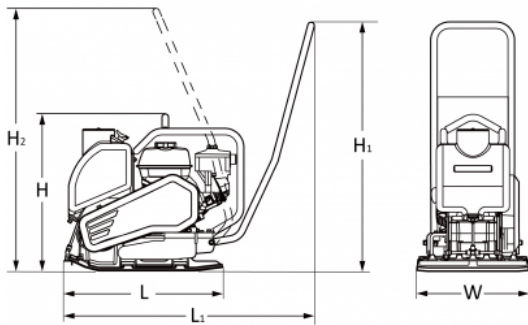

COMFORT HANDLE

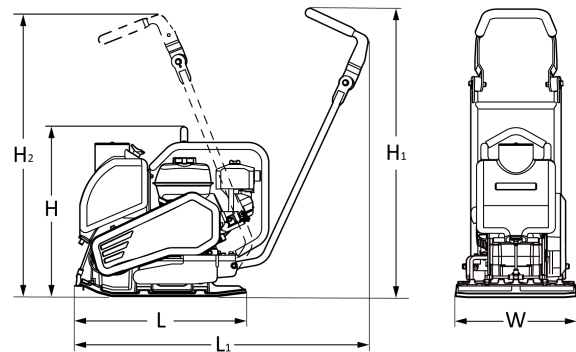

### DIMENSIONS

H. Height	630 mm
H1. Height, standard handle	945 mm
H2. Height, standard handle	980 mm
L1. Length, standard handle	970 mm
H1. Height, comfort handle	990 mm
H2. Height, comfort handle	980 mm
L1. Length, comfort handle	1070 mm
L. Length	610 mm
W. Basic plate width	500 mm

### STANDARD FEATURES

- Foldable steering handle with vibration isolation
- Highly wear resistant base plate
- Automatic shutdown at low oil level
- All around protection for V-belt
- Protection frame for powerpack
- Recoil starter
- Carrying handles
- One point lift

### OPTIONAL EQUIPMENT

- Water sprinkler system 11l (+2.5kg)
- Comfort handle
- Puncture proof transport wheels (+2kg)
- Block paving mat
- Service Kit

Find us locally at [www.dynapac.com](http://www.dynapac.com)

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines. The above information is a general description only, all informations are supplied without liability.