



TECHNICAL DATA

MASSES

Net mass	57 kg
Operating mass	58 kg

COMPACTION

Impact force, kN	15 kN
Vibration frequency	10 – 11.8 Hz

TRACTION

Max. area coverage	276 m ² /h
Max. working speed	20 m/min

ENGINE

Manufacturer/Model	Honda GXR 120
Number of cylinders	1
Type	Air cooled gasoline
Emissions according to	Stage V
Rated power	2.8 kW
Fuel tank capacity	3 l
Fuel consumption /h, avg.	0.9 l

DRIVE SYSTEM



Drive system	Mechanical
--------------	------------

Find us locally at www.dynapac.com

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines. The above information is a general description only, all informations are supplied without liability.



DIMENSIONS

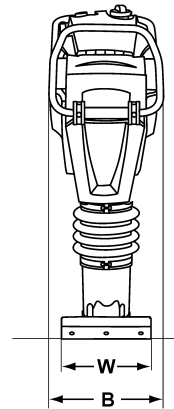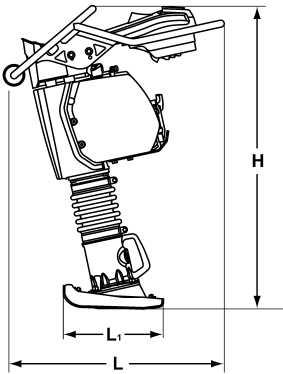

DIMENSIONS

B. Width	350 mm
H. Height	1030 mm
L. Length	728 mm
L1. Length	335 mm
W. Basic shoe width	230 mm

STANDARD FEATURES

- Low vibration handle
- Dual stage fuel filter system
- Air pre-filter with self cleaning housing
- Auto oil level check before start
- Engine protection covers
- One knob to start or stop both engine & fuel
- Infinitely variable frequency
- Recoil starter
- Loading aid rollers on handle
- One point lift
- Hour and rpm display

OPTIONAL EQUIPMENT

- Puncture proof transport wheels
- Foot widths
- Foot extensions
- Service kit

Find us locally at www.dynapac.com

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines. The above information is a general description only, all informations are supplied without liability.