



## TECHNICAL DATA

### MASSES

Net mass	66 kg
Operating mass	67 kg

### COMPACTION

Impact force, kN	16 kN
Vibration frequency	10.0 – 11.8 Hz

### TRACTION

Max. area coverage	336 m <sup>2</sup>
Max. working speed	20 m/min

### ENGINE

Manufacturer/Model	Honda GX 100
Number of cylinders	1
Type	Air cooled gasoline
Emissions according to	Stage V /CARB Phase III
Fuel tank capacity	3 l
Fuel consumption /h, avg.	0.9 l

### DRIVE SYSTEM



Drive system	Mechanical
--------------	------------

Find us locally at [www.dynapac.com](http://www.dynapac.com)

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines. The above information is a general description only, all informations are supplied without liability.



## DIMENSIONS

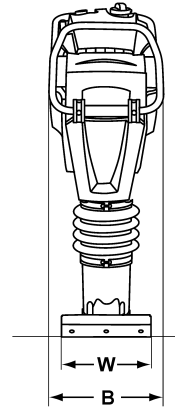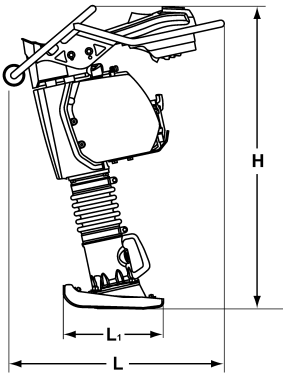

### DIMENSIONS

B. Width	350 mm
H. Height	1030 mm
L. Length	728 mm
L1. Length	335 mm
W. Basic shoe width	280 mm

### STANDARD FEATURES

- Low vibration handle
- Dual stage fuel filter system
- Air filter
- Auto oil level check before start
- Engine protection covers
- One knob to start or stop both engine & fuel
- Infinitely variable frequency
- Recoil starter
- Loading aid rollers on handle
- One point lift

### OPTIONAL EQUIPMENT

- Hour and rpm display
- Puncture proof transport wheels
- Foot widths & extensions
- Service kit

Find us locally at [www.dynapac.com](http://www.dynapac.com)

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines. The above information is a general description only, all informations are supplied without liability.