

# SD2530CS HIGHWAY PAVERS



- Integrated advanced leveling solutions
- Big hopper volume
- · Perfect overview with slidable cabin
- Increased traction due to longer tracks

# **TECHNICAL DATA**

#### **MASSES**

Weight 22.5 t

#### **DIMENSIONS**

Basic width2.55 mWorking width, max.10 mWorking width, minimum (with reducing shoe)2.05 mFront ramp angle13°

#### **CAPACITY**

Placement thickness (max) 360 mm

Theoretical placement capacity 800 t/h

## **MATERIAL HOPPER**

Capacity 7.0 m $^{3}$  (17 t) Dumping height (center/outside) 525 mm /530 mm Hopper width, internal 3.29 m

#### **TRACTION**

Paving speed 20 m/min
Transport speed 3.0 km/h

#### **ENGINE**

Manufacturer/Model Cummins QSB 6.7-C200
Emissions according to EU Stage IIIA
Rated power, SAE J1995 142 kW (193 Hp) @ 2200 rpm
Electrical system 24 V
Fuel tank capacity 337 I

## **ENGINE**

Manufacturer/Model Cummins B6.7CSIV201F
Emissions according to China IV
Rated power, SAE J1996 149 kW @ 2200 rpm
DEF tank capacity 37 I
Electrical system 24 V
Fuel tank capacity 362 I

#### **UNDERCARRIAGE**

Crawler length 3.36 m

Crawler width 320 mm

Drive Technology Hydrostatic

#### **CONVEYOR**

Conveyor type Dual bar feeder

Conveyor control Automatic with limit switches

Conveyor width 2x 655 mm

#### **AUGER**

Auger diameter 380 mm

Auger control Automatic with ultrasonic sensors

#### Find us locally at www.dynapac.com

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines. The above information is a general description only, all informations are supplied without liability.




# SD2530CS HIGHWAY PAVERS



- Integrated advanced leveling solutions
- Big hopper volume
- Perfect overview with slidable cabin
- Increased traction due to longer tracks

# **DIMENSIONS**

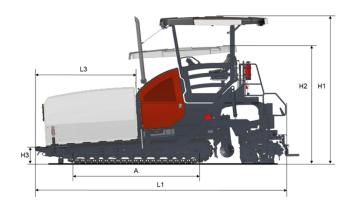




## **DIMENSIONS**

A. Axle track	3.36 m
B1. Width, max.	3460 mm
B2. Width, standard	2.55 m
B3. Width, center of tracks	1.99 m
C1. Track width	0.32 m
H1. Height, max.	3.90 m
H2. Height, transport	3.10 m
H3. Height	0.46 m
L1. Length	6.63 m
L3. Length, hopper	2.60 m

## Find us locally at www.dynapac.com

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines. The above information is a general description only, all informations are supplied without liability.



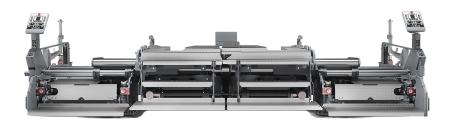


# **COMPATIBLE SCREEDS**


# **V5100 TV / TV E**



## **V6000 TV / TV E**



# **R300 TV / TV E**





#### Find us locally at www.dynapac.com

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines. The above information is a general description only, all informations are supplied without liability.