



TECHNICAL DATA

MASSES

Max. operating mass	1340 kg
Operating mass (CECE)	1260 kg

DIMENSIONS

Basic width	0.8 m
Working width, min.	0.25 m
Working width, max.	1.65 m

CAPACITY

Paving thickness (max/min)	5-100 mm
Theoretical placement capacity	35 t/h

MATERIAL HOPPER

Capacity	0.6 m ³
----------	--------------------

TRACTION

Paving speed	0-25 m/min
Transport speed	0-5 km/h

ENGINE

Manufacturer/Model	Hatz 1B50E
Emissions according to	EU Stage V / U.S. Tier 4F
Rated power	7.6 kW
Type	Air cooled
Electrical system	12 V
Fuel tank capacity	5 l

UNDERCARRIAGE

Final drive	Hydrostatic
Front wheels	1x 330/152 mm
Rear wheels	2x 432/127 mm
Turning radius (inside)	950 mm

CONVEYOR

Conveyor control	Automatic with limit switch and flow gates
Conveyor type	One conveyor, reversible

AUGER


Auger control	Automatic with limit switch
Auger diameter	120 mm

Find us locally at www.dynapac.com

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines. The above information is a general description only, all informations are supplied without liability.



DIMENSIONS

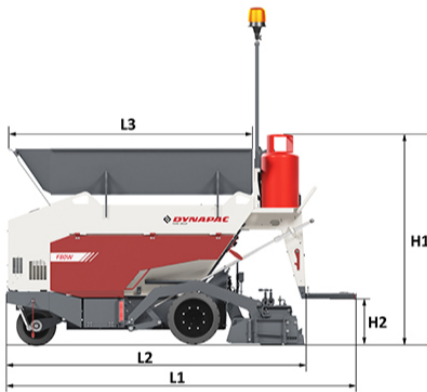

DIMENSIONS

B. Width	1.15 m
H1. Height	1.59 m
H2. Height, operator platform	0.43 m
L1. Length	2.86 m
L2. Length, transport	2.55 m
L3. Length, hopper	1.67 m

OPTIONAL EQUIPMENT


- Mechanical extensions (2x 175 mm) till 1650 mm
- Twin rear wheels
- Hopper filling help
- Additional auger LED light
- Copying roller
- Customer Colour
- Emergency Kit
- Front wheel scraper
- USB Documentation

Find us locally at www.dynapac.com

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines. The above information is a general description only, all informations are supplied without liability.

COMPATIBLE SCREEDS

V1300V

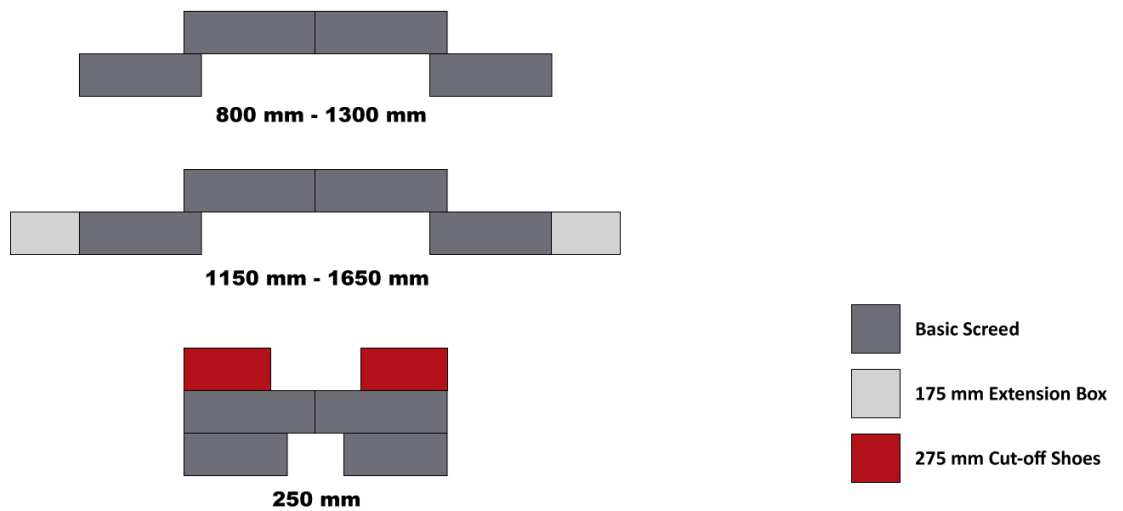

Find us locally at www.dynapac.com

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines. The above information is a general description only, all informations are supplied without liability.